

## + Enterprise Solutions

High-Density KVM Switch  
Hideaway™ LCD KVM Switch  
KVM Over the NET™  
Cat 5 Matrix KVM Switch  
Serial Over the NET™  
Power Over the NET™  
Guardian Over the NET™  
KVM over Wireless  
KVM Extender  
KVM Modules  
Control Center Over the NET™  
pcIPcard

## + SMB & SOHO KVM

2 Port KVM Switches  
4 Port KVM Switches  
8 Port KVM Switches  
16 Port KVM Switches  
Multi-user KVM Switches  
LCD KVM Switches  
Remote IP KVMs  
KVM Extenders  
KVM Converters / Emulators  
PC Sharing Devices

## + Embedded Solutions

IPMI

## + Video Products

[Video Switches](#)  
[Video Splitters](#)  
[Video Extenders](#)

## + USB Products

USB Hubs  
Data Connectivity Cables  
PCI Cards  
Converters  
Peripheral Switches

# VS-261



### + Download :



[Manual](#)



[Driver](#)



[Q&S](#)



[Firmware](#)

→ [360° View](#)

If you have problems viewing this, please click [here](#)

### ★ Awards

#### ● 2 Port DVI Video Switch

→ The VS-261 is a video switch with 2 ports. It combines the DVI (Digital Visual Interface) video switch function and high-quality stereo sound effect, thus creating an original direction for the functional application of multimedia.

**Patent NO. :** TW 081926 (Taiwan) ,CN ZL 02301203.X (China) ,CN ZL 01260527.1 (China) ,US 6464197B1 (USA)

## | Features

- Displays the video output of two digital devices (e.g., DVD Player, Computer) on a single DVI display device
- Fully compliant with DVI-Digital and DVI-Analog.
- Audio enabled

## + Serial Interface

PCI Cards

## + Data Communication

Auto Switches  
Industry Controls

## + FireWire

Hubs  
PCI Cards

## + KVM Cables


PS/2 KVM Cables  
DVI KVM Cables  
USB KVM Cables  
Daisy Chain Cables  
Others KVM Cables

- Quick and easy switching via pushbuttons or IR remote control
- Remote or LED push button selection.
- Independent audio input.
- Stackable design.
- Support PCs and Macs
- DDC, DDC2, DDC2B Compatible

## Package Content

- 1x DVI Video Switch
- 1x IR Remote Control Handset
- 1x Power Adapter
- 1x User Manual

## Diagram

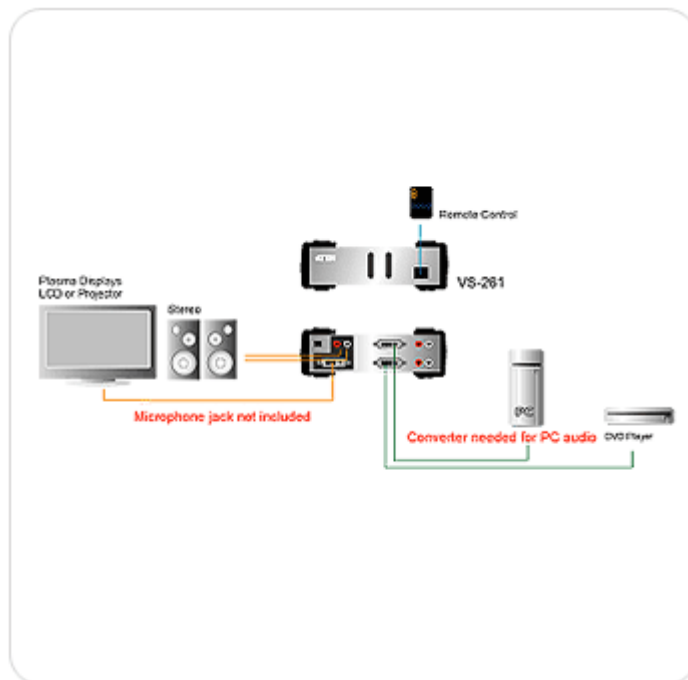

+ [View enlargement](#)

## Specification

<b>Connections</b>		2
<b>Port Selection</b>		Pushbutton, IR Remote Control
<b>Connectors</b>	Video In	2 x DVI Female
	Audio In	4 x Stereo RCA Jack Female
	Video Out	1 x DVI Female
	Audio Out	2 x Stereo RCA Jack Female
	Power	1 x DC Jack (Black)
<b>LEDs</b>	Online	2 (Orange)

	Selected	2 (Green)
<b>Video</b>		1600 x 1200 @60Hz
<b>Power Consumption</b>		DC5.3V,1.9W (Max.)
<b>Environment</b>	Operating temperature	0°C~50°C
	Storage temperature	-20°C~60°C
	Humidity	0 ~80% RH, NC
<b>Physical Properties</b>	Housing	Metal
	Weight	0.5kg
	Dimension ( L x W x H )	14 x 8.5 x 5.5cm

- \* The specification and pictures are subject to change without notice.
- \* All trademarks and logos are the properties of their respective holders.